

MAR 0 2 1999

Please type a plus sign (+) inside this box → **+**

PTO/SB/21 (12-97)  
Approved for use through 9/30/00. OMB 0651-0031  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

JC526 U.S. PTO  
09/263311



03/08/99

# TRANSMITTAL FORM

(to be used for all correspondence after initial filing)

Application Number	N/A
Filing Date	March 3, 1999
First Named Inventor	John Korman
Group Art Unit	N/A
Examiner Name	N/A
Attorney Docket Number	1858.001

Total Number of Pages in This Submission

## ENCLOSURES (check all that apply)

<input checked="" type="checkbox"/> Fee Transmittal Form <input checked="" type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment / Response <input type="checkbox"/> After Final <input checked="" type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Response to Missing Parts/Incomplete Application <input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Assignment Papers (for an Application) <input checked="" type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition Routing Slip (PTO/SB/69) and Accompanying Petition <input type="checkbox"/> To Convert a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Small Entity Statement <input type="checkbox"/> Request for Refund	<input type="checkbox"/> After Allowance Communication to Group <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input type="checkbox"/> Additional Enclosure(s) (please identify below): <div>Check for \$1,382.00</div>
---	--	--

Remarks

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT

Firm or Individual name	Steven R. Bartholomew, Esq.
Signature	<i>Steven R. Bartholomew</i>
Date	March 3, 1999

## CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on this date: **3-3-99**

Typed or printed name	Betty Freire
Signature	<i>Betty Freire</i>
Date	3-3-99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

JC526 U.S. PTO  
03/08/99

09263311 030899

# Improved Terminal Block For Readily Connecting Customers to Any of a Plurality of Telecommunications Service Providers

## Field of the Invention

The present invention relates generally to communications equipment and, more specifically, to hardware for providing wired communications connections between customers and service providers.

## Background of the Invention

Presently-existing telecommunications infrastructure has been inherited from an era where customers were not offered a choice of landline service providers. Each geographic region of the United States was served by a corresponding service provider commonly referred to as a Regional Bell Operating Company, or RBOC. Accordingly, telecommunications interconnection hardware was originally designed with the assumption that all landline customers in a given geographic area would be served by the same telecommunications service provider.

More recently, the Federal Communications Commission has opened up the wired telecommunication services marketplace to free competition. This policy shift was not without its practical ramifications, the most significant of which relates to the adaptability of presently-existing interconnection hardware for use in environments where customers are offered a selection of two or more service providers. Although existing hardware may perform adequately in the operational environment of a single landline service provider, it is oftentimes woefully inadequate to meet the needs of multiple service providers.

Another factor serving to further complicate interconnections between customers and multiple service providers is the current proliferation of ancillary

customer premises equipment. This equipment permits the tip/ring wire pair entering the customer premises to be utilized for implementing one or more ancillary functions in addition to providing access to the public switched telephone network (PSTN) via a service provider. These ancillary functions are provided via a local service loop, and the ancillary equipment may therefore be equipped with a switching mechanism for selecting either the local loop or the PSTN loop. The local loop may be utilized for a doorbell answering system, a mass announcement system, an emergency notification system, a fire alarm notification system, a security system, or for various other purposes. Since the ancillary equipment must be placed in series (or, less commonly, in parallel) with the tip/ring lines running to the customer premises, the use of such ancillary equipment necessitates additional interconnections.

Refer to FIG. 1, which is an electrical schematic diagram showing the manner in which customers may be connected to single service providers and ancillary equipment using prior art devices and techniques. Terminal block 100 includes a set of respective first terminals 102, 104, 106, 108, each of which is connected to a corresponding second terminal 118, 120, 122, 124, through a corresponding normally-closed contact 134, 136, 138, 140. During normal operation, contacts 134, 136, 138, and 140 remain closed. However, for testing and diagnostic purposes, one or more of these contacts may be temporarily opened, for example, by introducing an insulating plug between the electrical conductors of a contact. These insulating plugs do not remain in the contacts, and are removed after testing is completed.

A service provider provides incoming telephone lines in the form of tip/ring wire pairs. A tip wire 130 of a first phone line from the service provider is connected to terminal 102 of terminal block 100, and a ring wire 132 of this first phone line is connected to terminal 104. Terminal 102 is connected to terminal 118 through a normally closed contact 134. Terminal 118 is connected to a tip wire 138

which is routed to an input port of ancillary equipment such as a doorbell answering system 170. Terminal 104 is connected to terminal 120 through a normally closed contact 136. Terminal 120 is connected to a ring wire 140 which is routed to the input port of doorbell answering system 170. A tip wire 142 and a ring wire 144 are connected to an output port of the doorbell answering system 170.

Tip wire 142 is connected to terminal 122 of terminal block 100, and ring wire 144 is connected to terminal 124 of terminal block 100. Terminal 122 is connected to terminal 106 via a normally-closed contact 138, and terminal 124 is connected to terminal 108 via a normally-closed contact. Terminal 106 is connected to a tip wire 134 routed to a customer premises, and terminal 108 is connected to a ring wire 136 routed to this customer premises.

The doorbell answering system provides a mechanism for selectively coupling tip wire 138 to tip wire 142 and ring wire 140 to ring wire 144 when access from the customer premises to the PSTN is desired. However, when it is desired to furnish a local loop to the customer premises, doorbell answering system 170 disables coupling between tip wire 138 and tip wire 142, and also between ring wire 140 and ring wire 144.

Although the interconnection topology of FIG. 1 is adequate in the operational environment of a single service provider, difficulties arise when such a topology is utilized in an environment of multiple service providers. For example, assume that a given customer uses Ameritech for PSTN access, but resides in an area where PSTN access is also offered by Bell Atlantic. The customer decides that he will discontinue his Ameritech service in favor of Bell Atlantic. To implement this change, tip wire 130 and ring wire 132, connected to an Ameritech switching office, must be physically removed from terminals 102 and 104. New tip and ring wires from a Bell Atlantic switching office must then be attached to terminals 102 and 104.



With the current and expected proliferation of telecommunication service providers, it is likely that customers will be changing service providers more frequently than in years past. Such changes will cause ever-increasing amounts of terminal block wear-and-tear. Moreover, the opportunities for wiring errors will also increase. What is needed is an improved hardware topology specifically adapted to environments where service providers may be changed on an ongoing basis.

### Summary of the Invention

In view of the foregoing deficiencies of the prior art, it is an object of the invention to provide a hardware mechanism for readily changing a customer's landline telecommunications service provider.

It is a further object of the invention to provide interconnection techniques which do not require the rewiring of terminal blocks in order to change a customer's landline telecommunications service provider.

It is a still further object of the invention to provide interconnection techniques which do not cause unnecessary wear and tear on terminal blocks due to repeated changes in a customer's choice of service provider.

It is yet a further object of the invention to provide interconnection techniques for use in operational environments where more than one service provider is available, and where the customer is to be provided with a local telephone loop in addition to service provider access.

It is a still further object of the invention to provide interconnection techniques which enable technicians to identify wiring errors via a quick visual inspection.

In accordance with the objects of the invention, an improved terminal block is adapted to connect a customer with any one of a plurality of telecommunications service providers, so as to permit the customer's service provider to be changed

without inserting or removing wires from the terminal block.

Pursuant to a preferred embodiment of the invention, an improved terminal block includes a first connection mechanism which, when not disabled, connects a customer to a first service provider, a second connection mechanism which, when not disabled, connects the customer to a second service provider, and a disabling mechanism for disabling the first connection mechanism or the second connection mechanism.

Pursuant to a further embodiment of the invention, a terminal block provides a plurality of first connection mechanisms and a plurality of second connection mechanisms. Each connection mechanism includes a first normally-closed contact in series between a first terminal and a second terminal, and a second normally-closed contact in series between a third terminal and a fourth terminal. Each respective first connection mechanism is associated with a corresponding second connection mechanism such that the second terminal of a respective first connection mechanism is electrically connected to the first terminal of a corresponding second connection mechanism, and the fourth terminal of a respective first connection mechanism is electrically connected to the third terminal of a corresponding second connection mechanism. Each of respective pairs of first and third terminals of the first connection mechanisms are connected to corresponding incoming twisted-pair telephone lines from a first telecommunications service provider. Each of respective pairs of second and fourth terminals of the second connection mechanisms are connected to corresponding incoming twisted-pair telephone lines from a second telecommunications service provider. Each of respective pairs of second and fourth terminals of first connection mechanisms, and, consequently, each of respective pairs of first and third terminals of second connection mechanisms, are electrically connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises. These telephone lines may be routed directly to the customer

premises, or routed to the customer premises through optional ancillary equipment that may place switching devices in series or parallel with these telephone lines. A disabling mechanism is used to open both normally-closed contacts of the first connection mechanism, thereby connecting a customer with the second telecommunications service provider, or to open both normally-closed contacts of the second connection mechanism, thereby connecting the customer with the first telecommunications service provider. The disabling mechanism may include one or more insulating plugs that are insertable between one or more normally-closed contacts.

A still further embodiment of the invention is used in the operational environment of optional ancillary equipment. Each of a plurality of first and second connection mechanisms is associated with a corresponding set of third and fourth connection mechanisms. Each third connection mechanism includes a first normally-closed contact in series between a first terminal and a second terminal, and a second normally-closed contact in series between a third terminal and a fourth terminal. Each fourth connection mechanism also includes a first normally-closed contact in series between a first terminal and a second terminal, and a second normally-closed contact in series between a third terminal and a fourth terminal. Each respective third connection mechanism is associated with a corresponding fourth connection mechanism such that the second terminal of a respective third connection mechanism is electrically connected to the first terminal of a corresponding fourth connection mechanism, and the fourth terminal of a respective third connection mechanism is electrically connected to the third terminal of a corresponding fourth connection mechanism. Each of respective pairs of first and third terminals of third connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises. Each of respective pairs of second and fourth terminals of fourth connection mechanisms are



connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises. Each of respective pairs of second and fourth terminals of first connection mechanisms are connected to corresponding input terminals of optional ancillary equipment. Each of respective pairs of second and fourth terminals of third connection mechanisms are connected to corresponding output terminals of this optional ancillary equipment. A disabling mechanism disables the first connection mechanism and the associated third connection mechanism to provide access to the second service provider, or disables the second connection mechanism and the associated fourth connection mechanism to provide access to the first service provider. This disabling mechanism may be provided in the form of removable insulating plugs which are insertable into any of the normally-closed contacts such that, upon insertion, electrical continuity between the normally-closed contacts is broken.

### **Brief Description of the Drawings**

The foregoing and other objects and advantages of the present invention will become apparent to those skilled in the art upon reading the following detailed description of the preferred embodiments in conjunction with a review of the appended drawings in which:

FIG. 1 is an electrical schematic diagram showing the manner in which customers may be connected to any of a plurality of service providers using prior art devices and techniques.

FIG. 2 is an electrical schematic diagram showing the manner in which customers may be connected to any of a plurality of service providers using the techniques and devices of the present invention.

## Detailed Description of the Preferred Embodiments

In overview, an improved terminal block is provided for connecting a customer with any one of a plurality of telecommunications service providers, so as to permit the customer's service provider to be changed without inserting or removing wires from the terminal block. Refer to FIG. 2, which is an electrical schematic diagram showing the manner in which these customers may be connected to any of a plurality of service providers. Pursuant to a preferred embodiment of the invention, an improved terminal block 200 includes a first connection mechanism associated with a corresponding second connection mechanism. The first connection mechanism, when not disabled, connects a customer to a first service provider, and the second connection mechanism, when not disabled, connects the customer to a second service provider. A disabling mechanism is provided for disabling the first connection mechanism and/or the second connection mechanism.

In practice, terminal block 200 may provide a plurality of first connection mechanisms and a plurality of second connection mechanisms, but the example of FIG. 2 shows only one pair of first and second connection mechanisms for the sake of clarity. Each first connection mechanism includes a first normally-closed contact 266 in series between a first terminal 202 and a second terminal 218, and a second normally-closed contact 268 in series between a third terminal 204 and a fourth terminal 220. Each second connection mechanism includes a first normally-closed contact 282 in series between a first terminal 234 and a second terminal 250, and a second normally-closed contact 284 in series between a third terminal 236 and a fourth terminal 252. Each respective first connection mechanism is associated with a corresponding second connection mechanism such that the second terminal 218 of a respective first connection mechanism is electrically connected to the first terminal 234 of a corresponding second connection mechanism, and the fourth terminal 220 of a respective first connection mechanism is electrically connected to

the third terminal 236 of a corresponding second connection mechanism. Each of respective pairs of first and third terminals 202, 204 of the first connection mechanisms are connected to corresponding incoming twisted-pair telephone lines 130, 132 from a first telecommunications service provider. Each of respective pairs of second and fourth terminals 250, 252 of the second connection mechanisms are connected to corresponding incoming twisted-pair telephone lines 146, 148 from a second telecommunications service provider. Each of respective pairs of second and fourth terminals 218, 220 of first connection mechanisms, and, consequently, each of respective pairs of first and third terminals 234, 236 of second connection mechanisms, are electrically connected to corresponding outgoing twisted-pair telephone lines 138, 140 routed to a customer premises. These telephone lines 138, 140 may be routed directly to the customer premises, or routed to the customer premises through optional ancillary equipment that may place switching devices in series or parallel with these telephone lines. The example of FIG. 2 uses ancillary equipment in the form of doorbell answering system 170, although the use of such ancillary equipment is optional. A disabling mechanism is used to open both normally-closed contacts 266, 268 of the first connection mechanism, thereby connecting a customer with the second telecommunications service provider, or to open both normally-closed contacts 282, 284 of the second connection mechanism, thereby connecting the customer with the first telecommunications service provider.

The disabling mechanism may include one or more insulating plugs that are insertable between one or more normally-closed contacts.

A still further embodiment of the invention is used in the operational environment of optional ancillary equipment, such as doorbell answering system 170. Each of a plurality of first and second connection mechanisms is associated with a corresponding set of third and fourth connection mechanisms. Each third connection mechanism includes a first normally-closed contact 274 in series between

a first terminal 210 and a second terminal 226, and a second normally-closed contact 276 in series between a third terminal 212 and a fourth terminal 228. Each fourth connection mechanism also includes a first normally-closed contact 290 in series between a first terminal 242 and a second terminal 258, and a second normally-closed contact 292 in series between a third terminal 244 and a fourth terminal 260. Each respective third connection mechanism is associated with a corresponding fourth connection mechanism such that the second terminal 226 of a respective third connection mechanism is electrically connected to the first terminal 242 of a corresponding fourth connection mechanism, and the fourth terminal 228 of a respective third connection mechanism is electrically connected to the third terminal 244 of a corresponding fourth connection mechanism.

Each of respective pairs of first and third terminals 210, 212 of third connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines 134, 136 routed to a customer premises. Each of respective pairs of second and fourth terminals 258, 260 of fourth connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises.

Typically, twisted-pair telephone lines 134, 136 and twisted-pair telephone lines 150, 152 of a given set of associated third and fourth connection mechanisms are routed to the same customer premises, and each line is "owned" by a corresponding service provider. This practice results in a situation where one of the two twisted pairs is always inactive at any given moment in time. However, from a technical standpoint, the same pair of wires 134, 136 could be used to carry signals from either service provider, even though this is not "conventional" practice at the present time. In such an alternate system, wire 134 would be connected to terminal 210 as well as terminal 258, and wire 136 would be connected to terminal 212 as well as terminal 260, eliminating the need for redundant wire pair 150-152.

Such an alternate system is described herein inasmuch as future regulatory developments and changes to what is now considered common practice are difficult to predict with accuracy.

Each of respective pairs of second and fourth terminals 218, 220 of first connection mechanisms are connected to corresponding input terminals of optional ancillary equipment which, in the present example, is a doorbell answering system 170. Each of respective pairs of second and fourth terminals 226, 228 of third connection mechanisms are connected to corresponding output terminals of doorbell answering system 170. From a functional standpoint, doorbell answering system 170 includes switching devices to selectively couple wire 138 to wire 142, and to selectively couple wire 140 to wire 144. When wire 138 is not coupled to wire 142, and wire 140 is not coupled to wire 144, doorbell answering system 170 provides a local loop across wires 142 and 144 to the customer premises. This local loop enables communications between a customer and a person ringing the customer's doorbell.

A disabling mechanism disables the first connection mechanism and the associated third connection mechanism to provide access to the second service provider, or disables the second connection mechanism and the associated fourth connection mechanism to provide access to the first service provider. This disabling mechanism may be provided in the form of removable insulating plugs which are insertable into any of the normally-closed contacts such that, upon insertion, electrical continuity between the normally-closed contacts is broken. In this manner, terminal block 200 is wired so as to permit any of a plurality of customers to be connected to any of a plurality of service providers without the necessity of removing and/or reconnecting wires from the terminal block 200.

The arrangement of contacts on terminal block 200 provides a configuration wherein diagnostics and troubleshooting may be readily performed. Due to the fact

that the contacts are organized into a predetermined arrangement, only certain arrangements of insulating plugs in these contacts will provide a complete connection between a given service provider and a given set of telephone lines routed to a customer premises. Other arrangements of insulating plugs are erroneous, possibly resulting in a customer's line which is actually dedicated to a first service provider instead being connected to a second service provider. By viewing terminal block 200, it will be easy for service personnel to quickly identify any erroneous connections. If a first connection mechanism is disabled with an insulating plug, its associated third connection mechanism should also be disabled. If a second connection mechanism is disabled with an insulating plug, its associated fourth connection mechanism should also be disabled. Finally, the first connection mechanism and its associated second connection mechanism should not be enabled at the same time.

By adding additional contact sets to terminal block 200, it is possible to connect a customer to any of three, four, or more service providers. In the example of FIG. 2, a third service provider may be added by adding additional first, second, third, and fourth connection mechanisms to terminal block 200. The additional first connection mechanism would be connected to terminals 218, 220; the additional second connection mechanism to terminals 234, 236, the third connection mechanism to terminals 226, 228, and the fourth connection mechanism to terminals 242, 244. As is apparent to those skilled in the art, the foregoing principles can be applied to add any number of service providers to terminal block 200.

**We Claim:**

1. A terminal block including means for connecting a customer with any of a plurality of telecommunications service providers, wherein the customer's service provider is changed without inserting or removing wires from the terminal block.

2. A terminal block for connecting a customer with any of a plurality of telecommunications service providers, the block including:

a first connection mechanism which, when not disabled, connects a customer to a first service provider;

a second connection mechanism which, when not disabled, connects the customer to a second service provider; and

a disabling mechanism for disabling either the first connection mechanism or the second connection mechanism.

3. The terminal block of claim 2 wherein the first and second connection mechanisms each include normally-closed contacts, and the disabling mechanism includes one or more insulating plugs insertable into at least one of the normally-closed contacts, so as to disable the first connection mechanism or the second connection mechanism or both the first and the second connection mechanisms.

4. A terminal block for connecting a customer with any of a plurality of telecommunications service providers, including:

a plurality of first connection mechanisms and a plurality of second connection mechanisms;

each first connection mechanism including a first normally-closed contact in series between a first terminal and a second terminal, and a second normally-closed

contact in series between a third terminal and a fourth terminal;

each second connection mechanism including a first normally-closed contact in series between a first terminal and a second terminal, and a second normally-closed contact in series between a third terminal and a fourth terminal.

5. The terminal block of claim 4 wherein each of respective first connection mechanisms is associated with a corresponding second connection mechanism such that the second terminal of a respective first connection mechanism is electrically connected to the first terminal of a corresponding second connection mechanism, and the fourth terminal of a respective first connection mechanism is electrically connected to the third terminal of a corresponding second connection mechanism.

6. The terminal block of claim 5 further including a disabling mechanism in the form of removable insulating plugs which are insertable into any of the normally-closed contacts such that, upon insertion, electrical continuity between the normally-closed contacts is broken.

7. The terminal block of claim 6 wherein each of respective pairs of first and third terminals of first connection mechanisms are connected to corresponding incoming twisted-pair telephone lines from a first telecommunications service provider, and each of respective pairs of second and fourth terminals of second connection mechanisms are connected to corresponding incoming twisted-pair telephone lines from a second telecommunications service provider.

8. The terminal block of claim 7 wherein each of respective pairs of second and fourth terminals of first connection mechanisms and/or each of respective pairs of first and third terminals of second connection mechanisms are electrically



connected to corresponding outgoing twisted-pair telephone lines.

9. The terminal block of claim 8 wherein the outgoing twisted-pair telephone lines are routed to a customer premises.

10. The terminal block of claim 8 wherein the outgoing twisted-pair telephone lines are routed to a customer premises through ancillary equipment.

11. The terminal block of claim 10 wherein the ancillary equipment includes a switching mechanism for providing a local loop to the customer premises.

12. The terminal block of claim 8 wherein one or more removable insulating plugs are inserted into the first and second normally-closed contacts so as to connect a customer with the second telecommunications service provider, or into the third and fourth normally-closed contacts so as to connect the customer with the first telecommunications service provider.

13. The terminal block of claim 7 wherein each of a plurality of first and second connection mechanisms is associated with a corresponding set of third and fourth connection mechanisms.

14. The terminal block of claim 13 wherein each third connection mechanism includes a first normally-closed contact in series between a first terminal and a second terminal, and a second normally-closed contact in series between a third terminal and a fourth terminal, and each fourth connection mechanism includes a first normally-closed contact in series between a first terminal and a

second terminal, and a second normally-closed contact in series between a third terminal and a fourth terminal.

15. The terminal block of claim 14 wherein each respective third connection mechanism is associated with a corresponding fourth connection mechanism such that the second terminal of a respective third connection mechanism is electrically connected to the first terminal of a corresponding fourth connection mechanism, and the fourth terminal of a respective third connection mechanism is electrically connected to the third terminal of a corresponding fourth connection mechanism.

16. The terminal block of claim 15 wherein each of respective pairs of first and third terminals of third connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises.

17. The terminal block of claim 15 wherein each of respective pairs of second and fourth terminals of fourth connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises.

18. The terminal block of claim 16 wherein each of respective pairs of second and fourth terminals of first connection mechanisms are connected to corresponding input terminals of an ancillary switching device including a mechanism for providing local loops on the outgoing twisted-wire pair telephone lines.

19. The terminal block of claim 17 wherein each of respective pairs of second and fourth terminals of first connection mechanisms are connected to corresponding input terminals of an ancillary switching device including a

mechanism for providing local loops on the outgoing twisted-wire pair telephone lines.

20. The terminal block of claim 18 wherein each of respective pairs of second and fourth terminals of third connection mechanisms are connected to corresponding output terminals of the ancillary switching device.

21. The terminal block of claim 19 wherein each of respective pairs of second and fourth terminals of third connection mechanisms are connected to corresponding output terminals of the ancillary switching device.

22. The terminal block of claim 15 wherein each of respective pairs of first and third terminals of third connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises, and each of respective pairs of second and fourth terminals of fourth connection mechanisms are connected to corresponding outgoing twisted-pair telephone lines routed to a customer premises.

23. The terminal block of claim 22 wherein a disabling mechanism disables the first connection mechanism and the associated third connection mechanism to provide access to the second service provider, or disables the second connection mechanism and the associated fourth connection mechanism to provide access to the first service provider.

24. The terminal block of claim 23 wherein the disabling mechanism includes one or more removable insulating plugs which are insertable into any of the normally-closed contacts such that, upon insertion, electrical continuity between the normally-closed contacts is broken.

## THE ABSTRACT

An improved terminal block includes a first connection mechanism which, when not disabled, connects a customer to a first service provider, a second connection mechanism which, when not disabled, connects the customer to a second service provider, and a disabling mechanism for disabling either the first connection mechanism or the second connection mechanism.

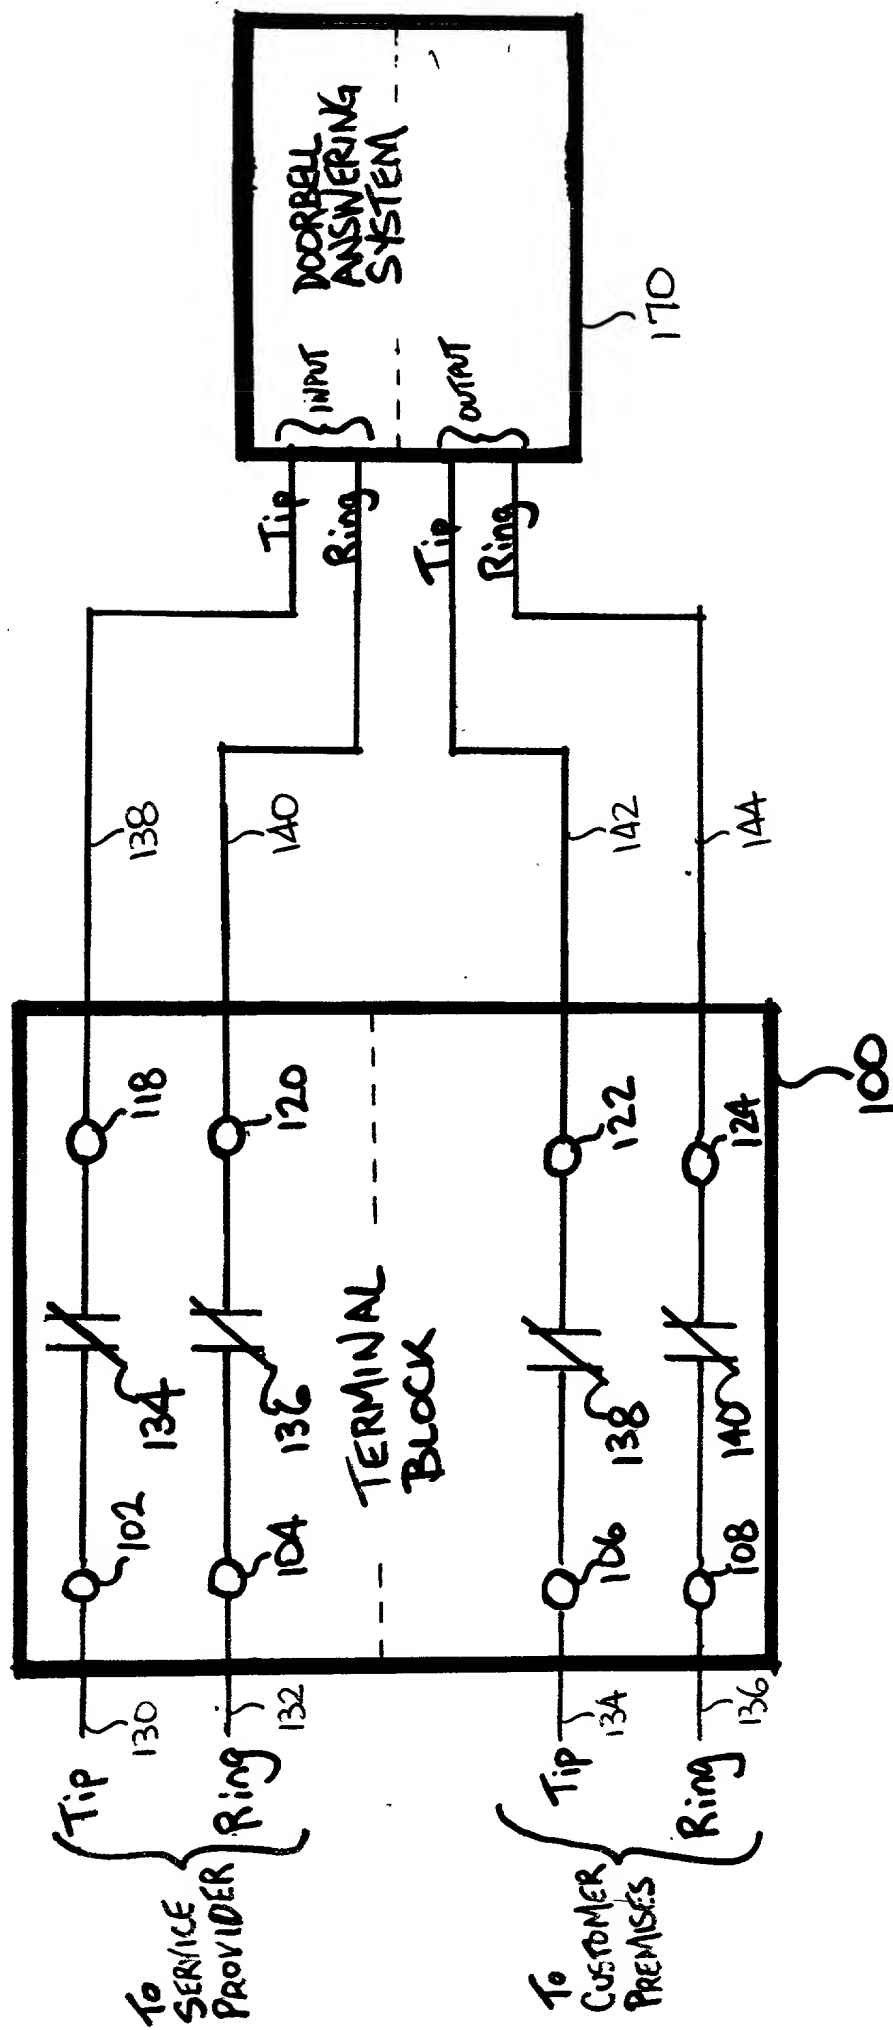


FIG. 1  
PRIOR ART

FIG. 2

FIRST SERVICE PROVIDER

SECOND SERVICE PROVIDER

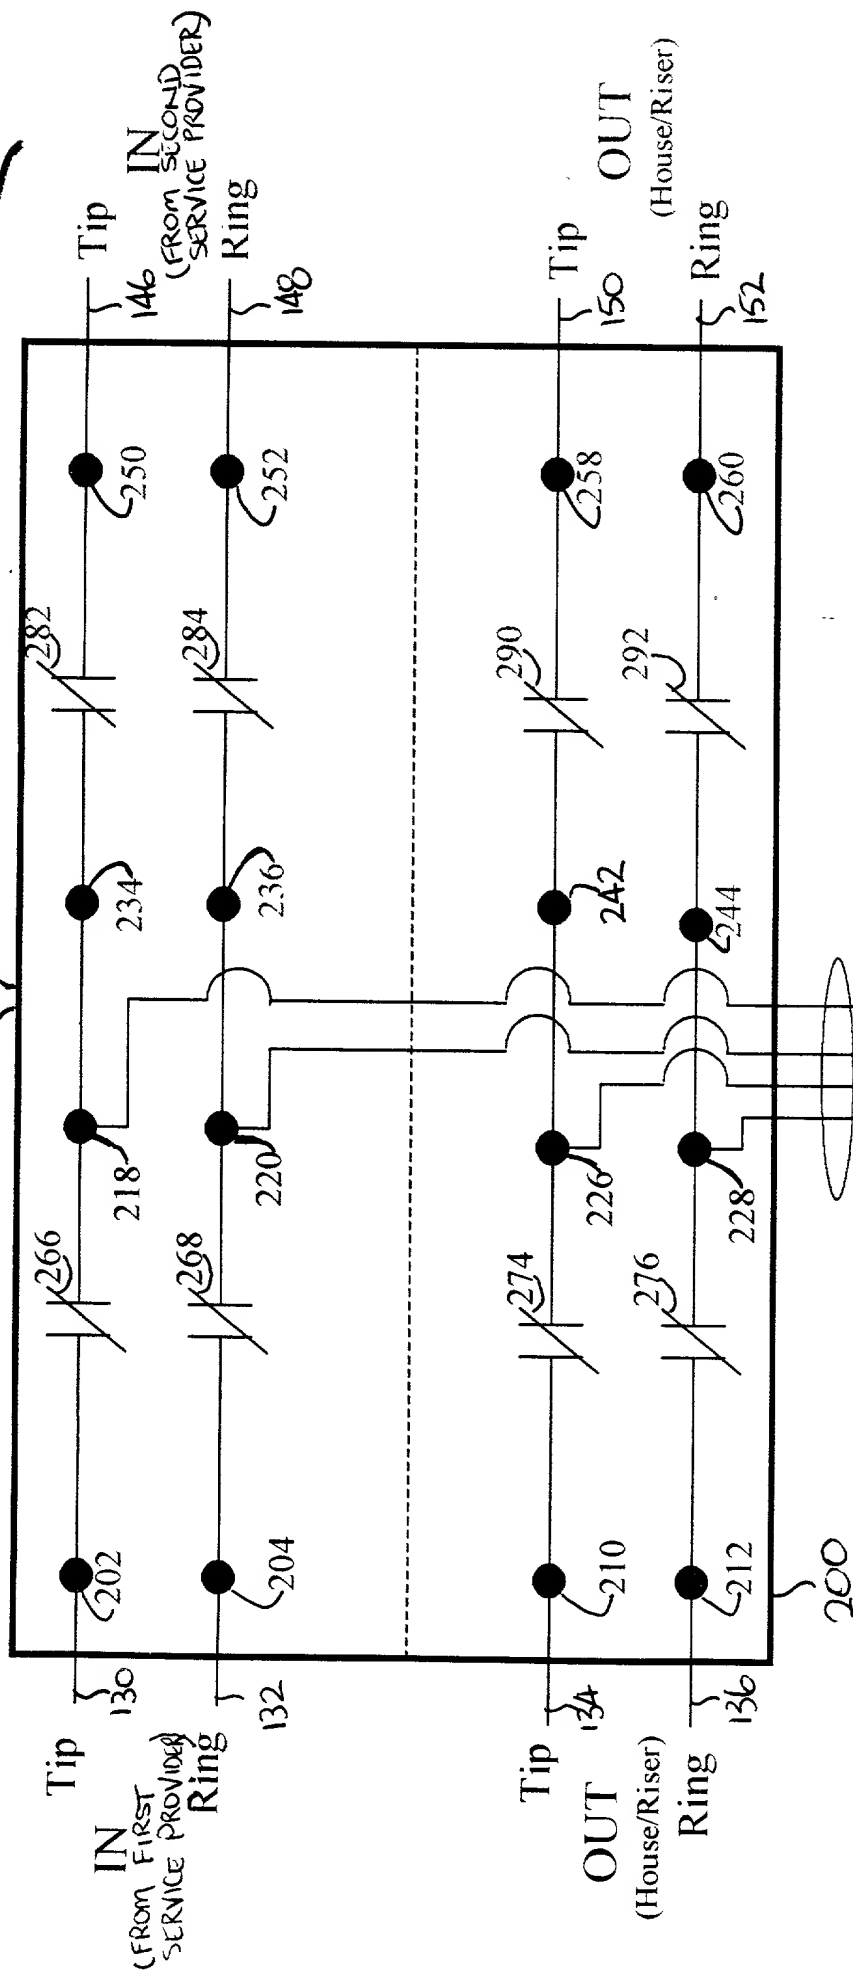


FIG. 2

**DECLARATION/POWER OF ATTORNEY FOR PATENT APPLICATION**

As below named inventors, we hereby declare that:

Our residence or post office address, and citizenship, are as stated below next to our name and signature.

We believe we are original, first, and joint inventors, of the subject matter which is claimed and for which a patent is sought on the invention entitled **IMPROVED TERMINAL BLOCK FOR READILY CONNECTING CUSTOMERS TO ANY OF A PLURALITY OF TELECOMMUNICATIONS SERVICE PROVIDERS**

We hereby state that we have reviewed and understood the contents of the above-identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

We hereby claim the benefit under Title 35, United States Code, § 119, § 120, § 121, and/or § 365 of any United States application(s) and/or foreign/international applications listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 (a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application: NONE

**POWER OF ATTORNEY:** As named inventors, we hereby appoint the following attorneys to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected therewith: Hopgood, Calimafde, Kalil & Judlowe, LLP, a firm consisting of Roy Hopgood, Reg. 15,245; John M. Calimafde, Reg. No. 16,895; Eugene J. Kalil, Reg. No. 16,686; Marvin N. Gordon, Reg. No. 23,094; Stephen B. Judlowe, Reg. No. 21,049; Francis J. Murphy, Reg. No. 24,537; Dennis J. Mondolino, Reg. No. 27,148; William G. Todd, Reg. No. 28,480; Ira B. Winkler, Reg. No. 29, 223; James M. Bollinger, Reg. No. 32,555; Porter F. Fleming, Reg. No. 31,759; Brian P. Murphy, Reg. No. 34,986; and Steven R. Bartholomew, Reg. No. 34,771.

SEND CORRESPONDENCE TO:

Hopgood, Calimafde, Kalil & Judlowe, LLP  
60 East 42nd Street  
New York, New York 10165

DIRECT PHONE CALLS TO:

Steven R. Bartholomew, Esq.  
(212) 551-5000 (x4102)

We hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of the first joint inventor:

John J. Korman

Inventor's Signature John J. Korman

Date: 3/1/99

Citizenship: United States

Residential Address: 33 Marion Avenue  
Stony Brook, New York 11790

Full name of the second joint inventor:

Russell J. Smith

Inventor's Signature Russell J. Smith

Date: 3-1-99

Citizenship: United States

Residential Address: 4115 Florence Road  
Bethpage, New York 11714